

SNV/U High Performances UV Microchip Series

Key features

- ▶ 355nm and 266nm
- ▶ Repetition rate up to 20kHz
- ▶ Ultrashort pulses down to 550ps
- ▶ Multi-kW peak power
- ▶ Excellent beam quality
- ▶ Efficient, air-cooled
- ▶ Sealed package, extremely long life



For generating high peak power ultraviolet pulses of a few hundred picoseconds, microchip lasers are economical, compact, and reliable. Micro-joule UV pulses are generated by harmonic conversion of the IR passively Q-switched Nd:YAG engine. Microchips are also easy to operate and service ; controllers can be used with every laser head model and swapped within minutes while conserving constant performances.

The SNV and SNU series are designed for high average power, delivering multi-kW peak power at repetition rates up to 20kHz.

Applications

- ▶ Semiconductor inspection
- ▶ Laser-induced fluorescence (LIF)
- ▶ Micro dissection
- ▶ Organic compound marking and micromachining
- ▶ Biohazard detection
- ▶ Time resolved fluorescence
- ▶ Laser Induced Breakdown Spectroscopy (LIBS)

For your application, find your pulsed laser solution

teem photonics™

Technical specifications:

	SNV-05P-100	SNV-20F-100 ⁽⁷⁾	SNU-02P-100	SNU-20F-100
Wavelength	355nm	355nm	266nm	266nm
Repetition Rate	>5kHz	>19kHz	>6kHz	>19kHz
Constant Pulse width range (FWHM)⁽¹⁾	<0.6ns	<0.6ns	<0.6ns	<0.6ns
Output power⁽²⁾	>5mW	>10mW	>2mW	>10mW
Output energy	>0.5μJ	>0.5μJ	>0.3μJ	>0.5μJ
Peak Power	>0.7kW	0.7kW	>0.5kW	>0.7kW
Short term (1min) power stability⁽³⁾	<±1%	<±1%	<±1%	<±2%
Long term (6 hrs) power stability⁽³⁾	<±5%	<±5%	<±5%	<±5%
Beam profile	Gaussian TEM00	Gaussian TEM00	See note (5)	See note (5)
Full angle divergence Horizontal@1/e² Vertical@1/e²	8.5±2mrad 6±2mrad	11±2mrad 7±2mrad	11±2mrad <1.5mm ⁽⁶⁾	11.5±2mrad 0.65±0.25mrad
M²⁽⁴⁾	<1.3	<1.3	<1.3	<1.4
Gaussian fit in far field	N/A	N/A	N/A	>85%
Polarization	Linear PER>20dB	Linear PER>20dB	Linear PER>20dB	Linear PER>20dB
Package dimensions	180x55x36mm	186x60x36mm	180x55x36mm	210x60x36mm
Package weight	400g	500g	400g	500g
Options (table p3)	C	C	C	C
Options included	-	S	-	S

Notes

(1)	Measured with 1Ghz photodiode and 1GHz/10GS/s oscilloscope.
(2)	Measurement performed with an OPHIR thermal power sensor (OPHIR 3A-FS-SH)
(3)	For temperature variation < ± 3°C and < 3°C/hour, stability is measured with calorimeter - detector band [DC, 2Hz]
(4)	Mean average value $M = \sqrt{XY}$, X and Y being respectively the major and minor axis of the ellipse
(5)	Beam exhibits different profile in horizontal (Gaussian) and vertical ((sin x / x) ² in far-field) plan
(6)	5%/95% diameter, at 300mm from laser output
(7)	Contact factory for availability

For your application, find your pulsed laser solution

teem photonics™

Complementary information & options:

Environment Parameters

Operating Temperature Range	15-35°C
Maximum Laser Head Baseplate Temperature	<50°C
Maximum Power Consumption	<40W
Laser Head Thermal Dissipation	<15W
Storage Temperature	0-50°C
Shock of 11ms according to IEC 68-2-27, non operating	25g
Vibration 5Hz to 500Hz sinusoidal according to IEC 68-2-6	2g

Certification

Laser classification according to IEC 60825-1:2007	3B for SNV-05P and SNV-20F 4 for SNU-02P and SNU-20F
CDRH	Yes, if used with a -DR1 controller
ROHs	Yes

Options

Collimation (C)	With collimated beam
Synchronization output (S)	TTL compatible output signal for synchronization/monitoring


Available Controller Types

Model	Type	Input Power	CDRH
MLC-03A-DR1	Desktop	100-240 V AC	Yes
MLC-03A-MR1	Module	12 V DC	No
MLC-03A-BR1	Board	12 V DC	No

For your application, find your pulsed laser solution

teem photonics™

CDRH Laser Head Mechanical Drawings : SNV-05P-100

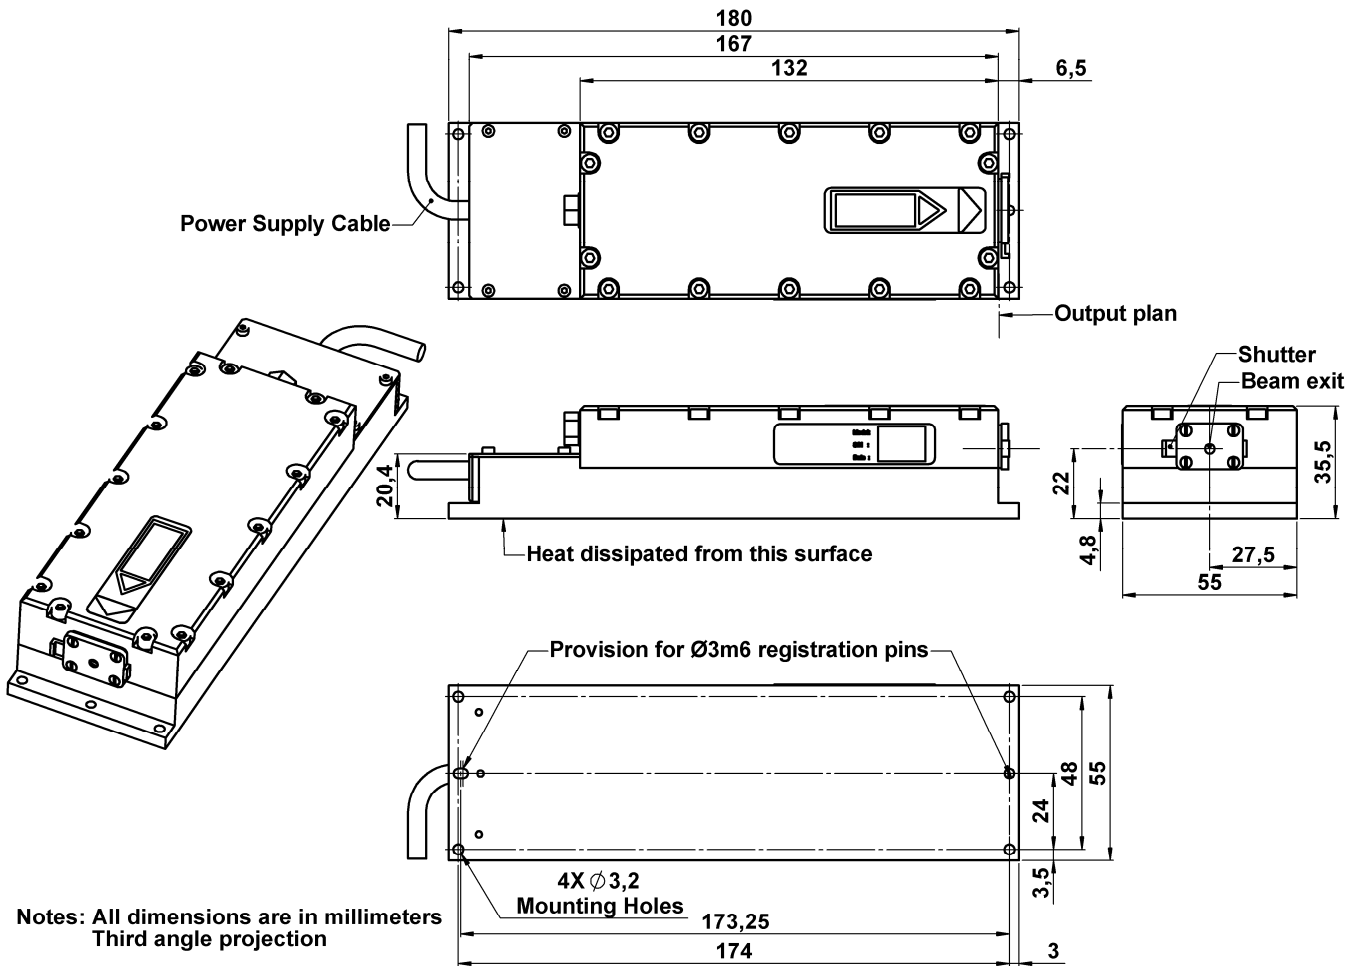


Notes: All dimensions are in millimeters
Third angle projection

For your application, find your pulsed laser solution

teem photonics™


CDRH Laser Head Mechanical Drawings : SNV-20F-100

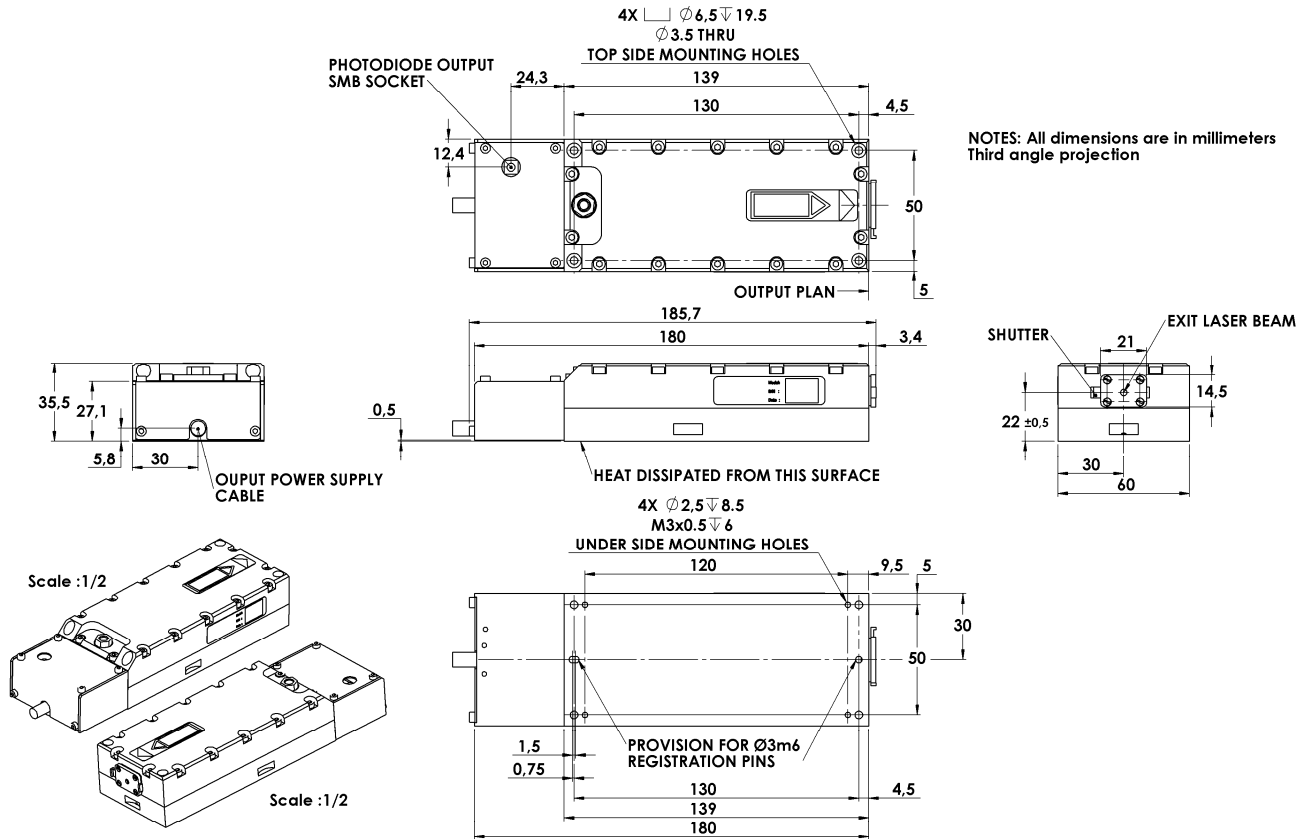

For your application, find your pulsed laser solution

teem photonics™

CDRH Laser Head Mechanical Drawings : SNU-02P-100

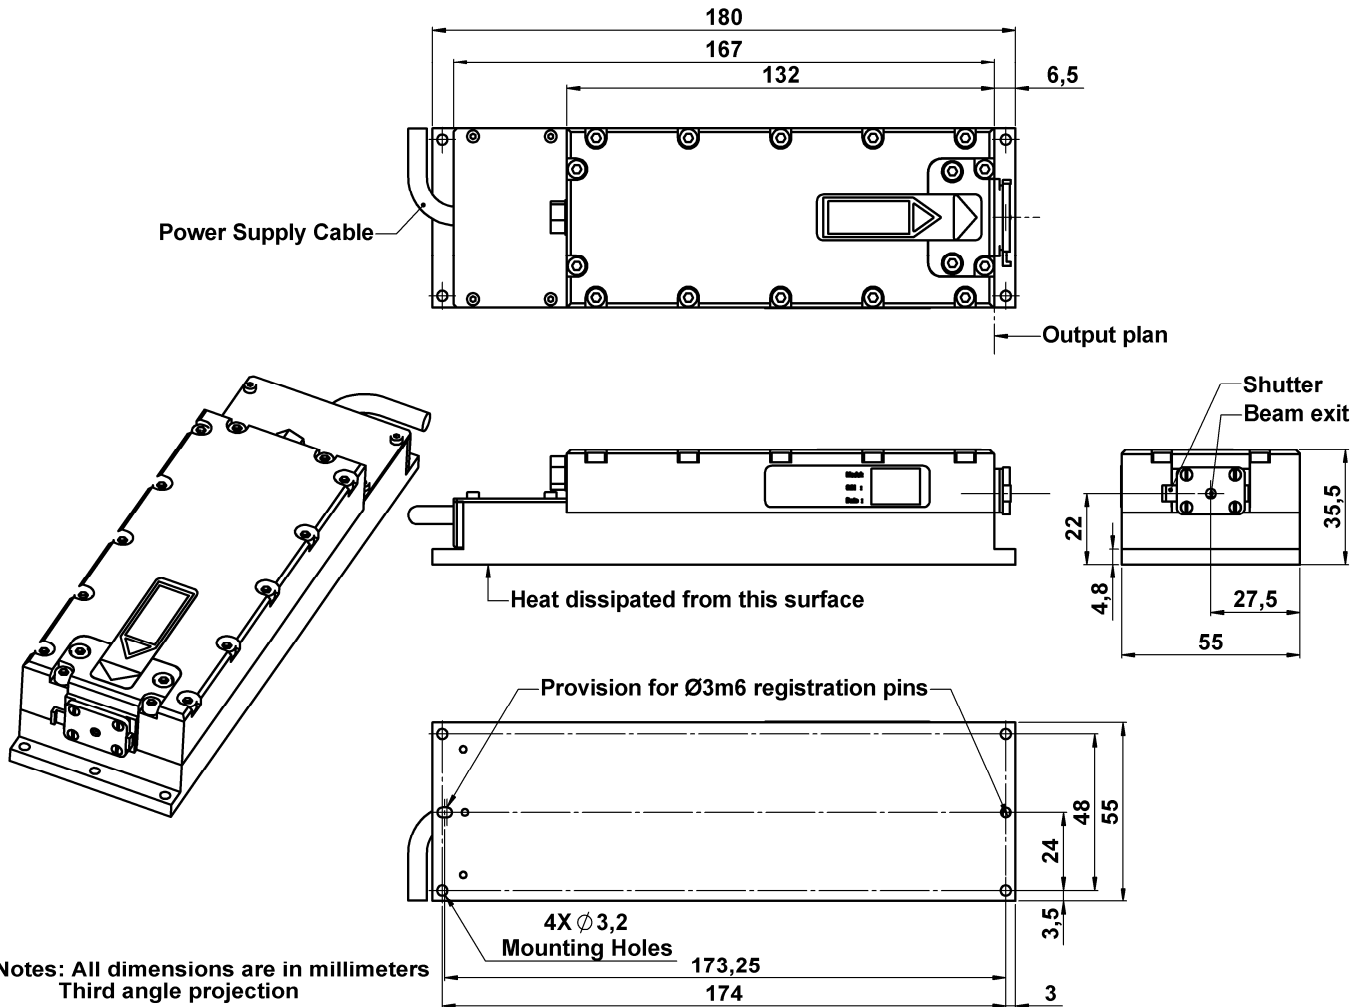

Notes: All dimensions are in millimeters
Third angle projection

For your application, find your pulsed laser solution

teem photonics™

CDRH Laser Head Mechanical Drawings : SNU-20F-100

